

Remote Weight Display



FEATURES

- Large 6 digit Red LED display
- Digit height - 57mm
- Digit-for-digit replication from the transmitting VT indicator
- Communication interface - RS-232, RS-485, or 20mA
- Baud rate and data format - DIP switch selectable
- Compatible with all VT indicators
- Environmental protection to IP65

DESCRIPTION

Vishay Transducers' RD10 is a compact, digit-for-digit, high visibility remote display.

The large LED display (57mm digits) and wide viewing angle contribute to ease of reading at long distances.


The VTRD10 is environmentally protected to IP65 and is suitable for outdoor use.

A standard serial interface (RS-232 or RS-485 or 20mA current loop) allows easy connection between the local indicator and the VTRD10 at distances up to 600 meters (RS-485). The VTRD10 is fully compatible with VT Weight Indicator models 50, 100, 200, 300, 400 and 500.

APPLICATIONS

- Truck scales/
Weighbridges
- Warehouse scales
- Loading bays
- All outdoor weighing applications

CONFIGURATION

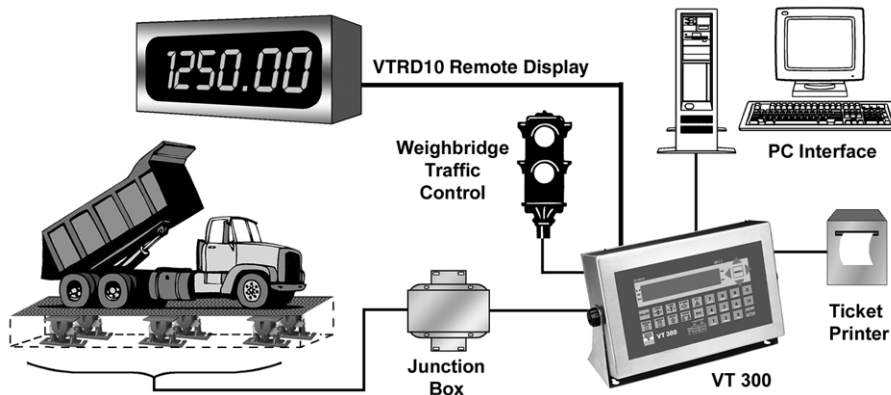

ORDERING INFORMATION

Item Number	Description
VTD10-2100178	Remote weight display



SPECIFICATIONS

DISPLAY AND SERIAL INTERFACE

Display: 6 digits, LED, high visibility (57mm, red)
Serial Interface: RS-232 or RS-485 or 20mA current loop, terminated with screw type terminals
Baud Rate: DIP switch selectable 1200, 2400, 9600, 19200 baud
Character Format: DIP switch selectable:
a) 7 data bits, even parity, 1 stop bit
b) 8 data bits, no parity, 1 stop bit
c) 8 data bits, even parity, 1 stop bit
Distance: RS-232 and 20mA current loop = 50 meters
RS-485 = 600 meters

ELECTRICAL

Voltage: 230VAC+10%, 50-60Hz
Power: 7W max.

ENCLOSURE

Stainless Steel:
Dimensions: 328.3x72x40mm LxHxD
Protection: IP65
Wiring Connections: cable glands

CE APPROVAL

ENVIRONMENTAL

Operating Temp: -10°C to +40°C (14°F to 104°F)
Storage Temp: -20°C to +55°C (4°F to 158°F)
Relative Humidity: 90% RH max., non condensing

Vishay Transducers is continually seeking to improve product quality and performance. Specifications may change accordingly.

VISHAY TRANSDUCERS (VT) SALES OFFICES

VT Americas
City of Industry, CA
PH: +1-626-858-8899
FAX: +1-626-332-3418
vt.us@vishaymg.com

VT Netherlands
Breda
PH: +31-76-548-0700
FAX: +31-76-541-2854
vt.nl@vishaymg.com

VMG UK
Basingstoke
PH: +44-125-646-2131
FAX: +44-125-647-1441
vt.uk@vishaymg.com

VMG Israel
Netanya
PH: +972-9-863-8888
FAX: +972-9-863-8800
vt.il@vishaymg.com

VMG Germany
Heilbronn
PH: +49-7131-3901-260
FAX: +49-7131-3901-2666
vt.de@vishaymg.com

VT China
Tianjin
PH: +86-22-2835-3503
FAX: +86-22-2835-7261
vt.prc@vishaymg.com

VMG France
Chartres
PH: +33-2-37-33-31-20
FAX: +33-2-37-33-31-29
vt.fr@vishaymg.com

VT Taiwan*
Taipei
PH: +886-2-2696-0168
FAX: +886-2-2696-4965
vt.roc@vishaymg.com
*Asia except China



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.